




Ra Line Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

Your box should contain

1x assembled luminaire



2x cotton gloves




Tools needed, not included

- Junction box and screw
- Flat head screwdriver
- Wire connectors




Unpack all components from the box and dispose of the packaging. Please recycle.

1 One person need to hold the fixture by the cable while the other does the installation.

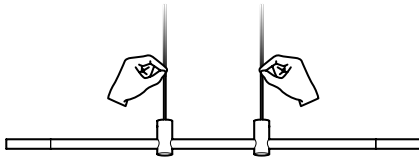


2 Install the canopy on the ceiling using appropriate anchors and screws in the 4 corners. Pass all wires thru canopy.




3 First, connect the two ground cables (green cables) together.


Then, connect the live and neutral wires. If the installation requires it, connect the Dali dimming wires.

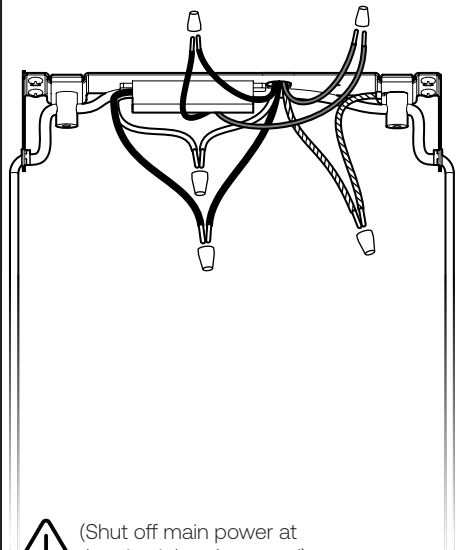

4 Unscrew the strain reliefs to adjust the lamp.

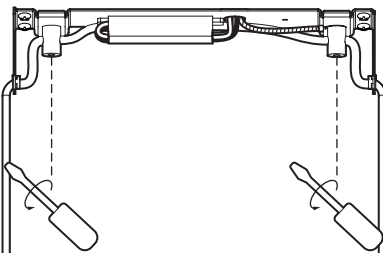


5 Adjust the lamp using a level.

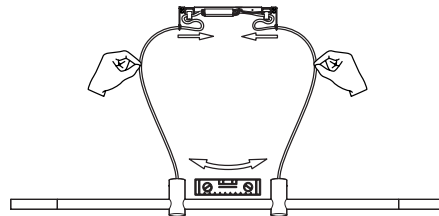

(Shut off main power at the circuit breaker panel)

| Ceiling wires | Fixture wires | | For 0-10V dimming | |
|---------------|---------------|-------|-------------------|-----|
| | 120V | 220V | | |
| Live | Black | Brown | | |
| Neutral | White | Blue | Purple + | DC+ |
| Ground | Green screw | | Grey - | DC- |

6 Tighten the strain reliefs to secure the lamp.

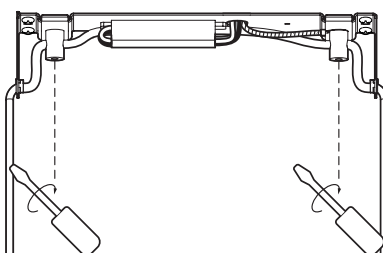

7 By holding the wires, slide the cover of the canopy on the fixed part of the canopy.

